

Industry-leading specialists in automated screens and screenings handling equipment




Rotapak 150/250/400 Screenings Handling Equipment

Key Benefits

- WIMES 6.03 compliant
- Capacity of 0.5m³/hr to 8m³/hr dependent on size
- 3 size options 150, 250, 400

- Handles screenings direct from the screen or conveyor
- Simple well proven design
- Suitable for sewage or sludge

Rotapak/150/250/400 Screenings Handling Equipment

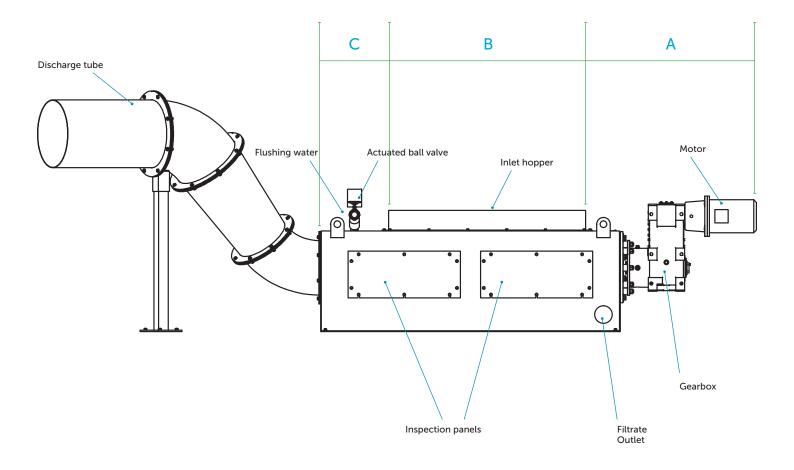

Features and Benefits Specifications

- · Mild steel bodies as standard, stainless steel options available
- Launder flow acceptance is possible
- Proven design since 1988
- Filtrate returned to main channel, normally under gravity
- Elevated or elongated discharge chute option

MODEL	150	250	400
Capacity	0.5m³/hr	2m³/hr	3 to 8m³/hr
Motor	1.1kW	2.2kW	4 to 7.5kW
Screw Diameter	150mm	250mm	400mm
A	450mm	650mm	650mm
В	400-2000mm	400-2500mm	600-2500mm
С	250mm	500mm	500mm

Washwater requirements 21/s