




ER Screen Coarse Screen

Key Benefits

- WIMES 5.02 compliant
- Compact design for use on medium or deep channels
- Can be readily installed in new or existing channels with the minimum of civil alterations
- Rake action is on an endless chain principle, there are no bearings or sprockets in the flow
- Perfect for protecting pumps and fine screens
- No washwater required

ER Screen Coarse Screen

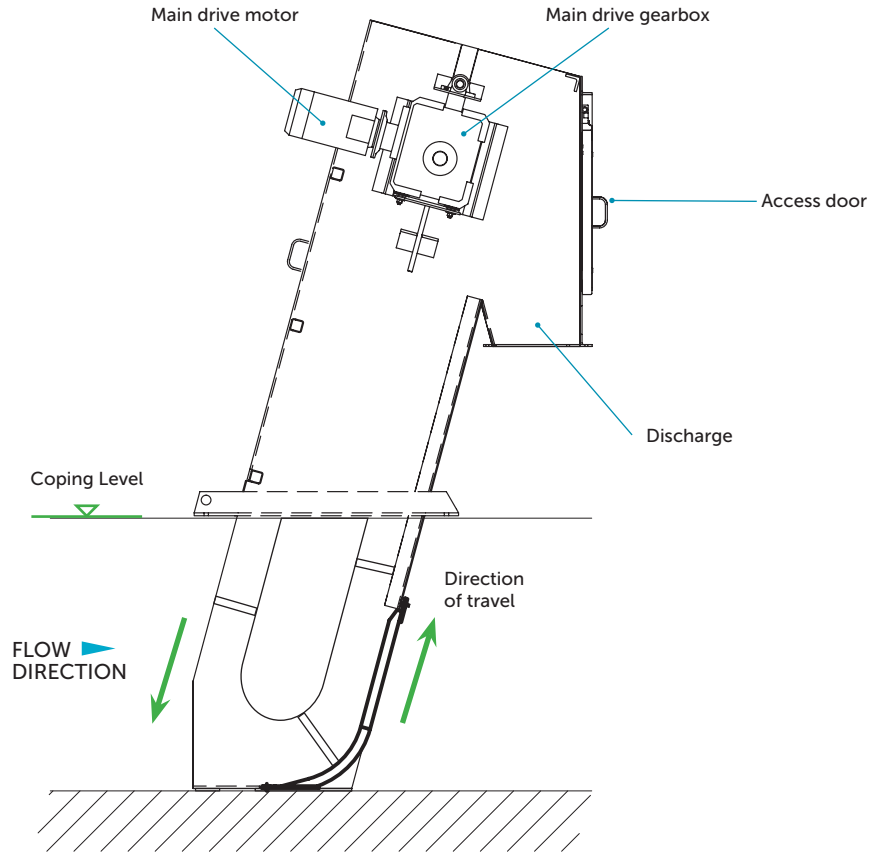

Features and Benefits

- Each screen is individually designed and manufactured to the customers' requirements
- Max channel width is 3000mm
- Max channel depth is 7500mm. For deeper channels please contact us
- Bar spacing from 6mm upwards
- Flow capacity is dependent on width of channel, top water level and bar spacing

Specifications

Minimum Width	500mm
Maximum Width	3000mm
Minimum Channel Depth	750mm
Maximum Channel Depth	7500mm
Minimum Flow	25 l/s
Maximum Flow	10,000 l/s
Bar Spacing Minimum	6mm
Bar Spacing Maximum	100m
Washwater Requirement	Zero